




2023 Exiss STK 7020 - 7'2" Tall

CONSTRUCTION FEATURES

- 6'8" or 7'2" inside height – 7'0" outside width
- Available in 16', 18', 20', 22', 24', 26', 28' & 30' lengths
- All aluminum construction w/ single piece aluminum roof
- Interlocking extruded aluminum non-skid plank floor system
- 2" x 4" I-beams on 10" centers
- (2) 7,000 lb. rubber torsion axles w/ electric brakes (16'-26')
- (2) 8,000 lb. rubber torsion axles w/ electric brakes (28'-30')
- Kingpin hitch w/ 2 5/16" adjustable coupler
- Breakaway switch w/ battery and slip hook safety chains
- Five 16" 8 hole steel wheels w/ 10 ply import tires (16'-26')
- Five 16" 8 hole steel wheels w/ 14 ply Goodyear tires (28'-30')
- Spare tire w/ exterior mount
- Single leg landing gear w/ removable crank handle
- .063 white aluminum sheets on nose area
- Extruded aluminum slat outside of stock area
- Running boards w/ extruded aluminum fenders
- Full-width rear rubber bumper
- LED brake and running lights
- 3/8 transferable warranty

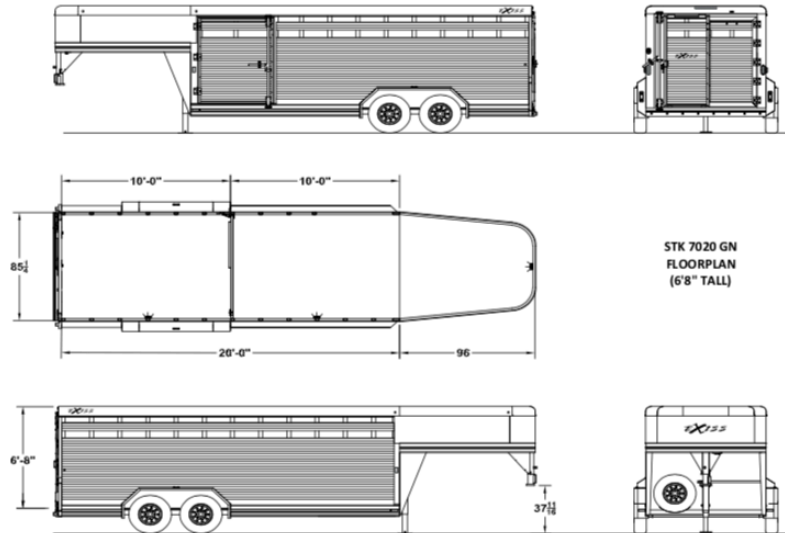

STOCK AREA FEATURES

- Two air gaps w/ Plexiglas tracks in stock area
- Full swing center gate w/ slider (2 on 24'-30' models)
- Heavy-duty slam latch w/ external release
- Heavy-duty drop gate w/ spring loaded latches
- Heavy-duty 54" streetside access door (w/ air gaps)
- Full swing rear door (w/ air gaps)
- Easy-glide slider w/ handle on rear door (w/ air gaps)
- One LED dome light per compartment w/ switch on rear frame
- One LED dome light in gooseneck nose

WARRANTY
8 year structural
3 years on components

OPTIONAL EQUIPMENT

- Side Sheets - .063 Mill Finish
- Rear Gate Slam Latch
- Height is 7'2"

MSRP: \$47,320
SALE PRICE: **\$39,999**

STOCK OPTIONS AVAILABLE FOR AN ADDITIONAL COST:
-HOOF GRIP FLOORING - \$2200 -RUBBER FLOOR MATTS \$1200 -PLEXIGLASS \$1000

YOUR PAYMENT

MONTHLY	BI-WEEKLY
\$455	\$210
OAC	OAC
TERM/AM	INTEREST RATE
180/180	9.99%
	APR 11.04%

OAC, finance fee of \$399 included in payment, cost of credit during term: \$39,588.60

MODEL	SIZE	GVWR	EMPTY WEIGHT	AXLES
STK 7020 - 6'8" Tall	7'0" X 20'0"	14,000	3,900	(2) 7,000
STK 7020 - 7'2" Tall	7'0" X 20'0"	14,000	4,100	(2) 7,000